**INSTRUCTIONS-PARTS LIST** 

**KEEP FOR REFERENCE** 



Rev. A

308-589

## 238–084 Air Restrictor Kit


## FOR USE IN HUSKY<sup>™</sup> 715 EVACUATION SYSTEMS

100 psi (7 bar) Maximum Air Input Pressure


Install the 238–084 air restrictor into the pump air inlet (A). The internal orifice of the restrictor reduces air flow to the pump. This allows the pump to have better suction lift and reduces the air consumption by the pump.

The Performance Chart on page 2 gives data for a restricted pump.

Refer to your separate pump manual for operating and service instructions.

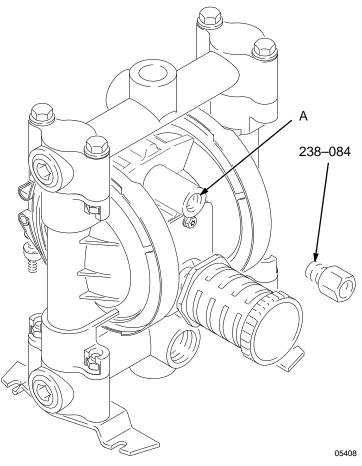

## **Performance Chart**

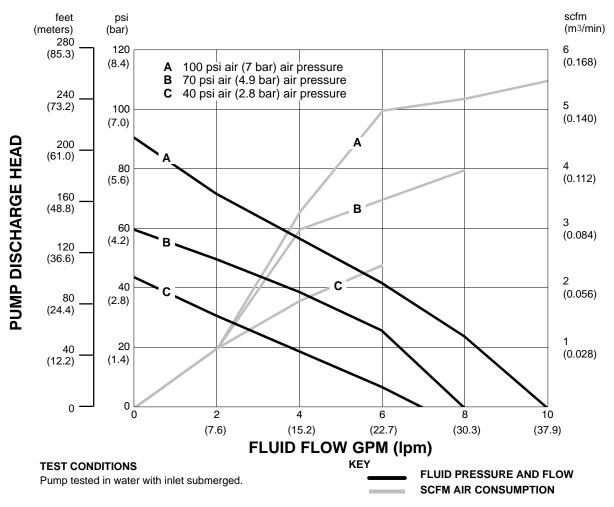

## **Important Phone Numbers**

*TO PLACE AN ORDER*, contact your Graco distributor, or call Graco: 1–800–367–4023 Toll Free

*FOR TECHNICAL ASSISTANCE*, service repair information or answers about the application of Graco equipment, call: **1–800–543–0339 Toll Free** 

Sales Offices: Atlanta, Chicago, Detroit, Los Angeles Foreign Offices: Belgium; Canada; England; Korea; Switzerland; France; Germany; Hong Kong; Japan

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

PRINTED IN U.S.A. 308–589 August 1995