

Hose Reel Fixed Installation Kit

3A1220B

ENG

For fixed installation of enclosed LD hose reels.

Models: 24G865




Important Safety Instructions

Read all warnings and instructions in this manual and your LD Series Enclosed Hose Reel instruction manual. Save all instructions.

Parts

Ref	Description	Qty
1	BRACKET, assy	1
2	BRACKET, roller, A	1
3	BRACKET, roller, B	1
4	PIN, roller	2
5	ROLLER, hose	2
6	SCREW, mach pan hd	2
8	CAP, mounting tube	2
9	TUBE, mounting	1
10	CLIP, button clip	1

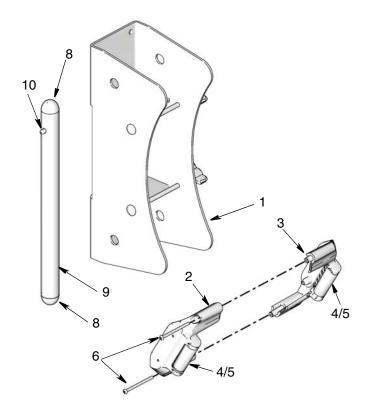

Warnings

The following warnings are for the setup, use, grounding, maintenance, and repair of this equipment. The exclamation point symbol alerts you to a general warning and the hazard symbols refer to procedure-specific risks. When these symbols appear in the body of this manual, refer back to these Warnings. Product-specific hazard symbols and warnings not covered in this section may appear throughout the body of this manual where applicable.

WARNING



MOVING PARTS HAZARD

Moving parts can pinch or amputate fingers and other body parts.

- Keep clear of moving parts.
- Do not operate equipment with protective guards or covers removed.
- Pressurized equipment can start without warning. Before checking, moving, or servicing equipment, follow the **Pressure Relief Procedure** in this manual. Disconnect power or air supply.



SKIN INJECTION HAZARD

High-pressure fluid from dispense valve, hose leaks, or ruptured components will pierce skin. This may look like just a cut, but it is a serious injury that can result in amputation. **Get immediate surgical treatment.**



- Do not point dispense valve at anyone or at any part of the body.
- Do not put your hand over the end of the dispense nozzle.
- Do not stop or deflect leaks with your hand, body, glove, or rag.
- Follow Pressure Relief Procedure in this manual, when you stop spraying and before cleaning, checking, or servicing equipment.


2 3A1220B

Installation




To reduce the risk of injury, be sure the mounting surface is strong enough to support the reels, weight of the lubricants and stress caused by hard pulls on the service hoses.

- See Technical Data, page 7 for weights of hose reel assemblies.
- Graco recommends using minimum screws size of 10 mm (3/8 inch)

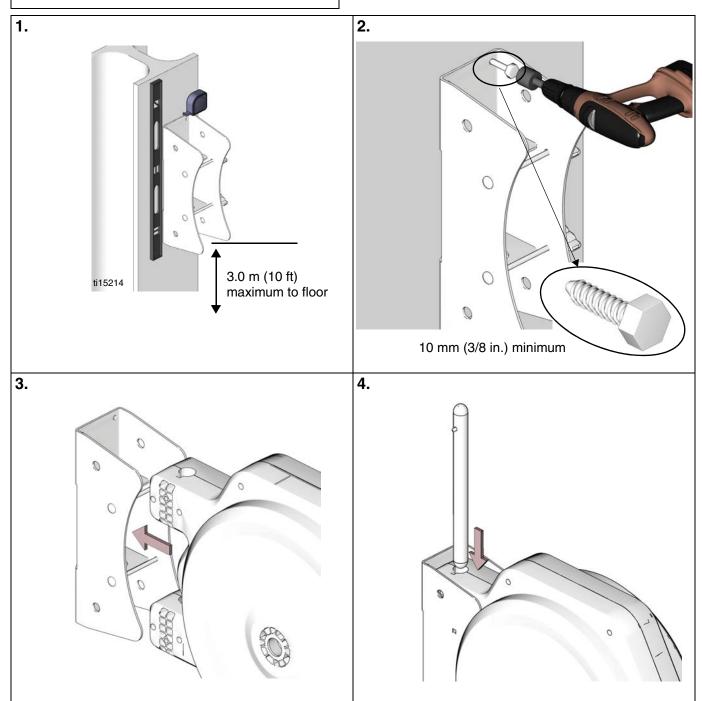

3A1220B 3

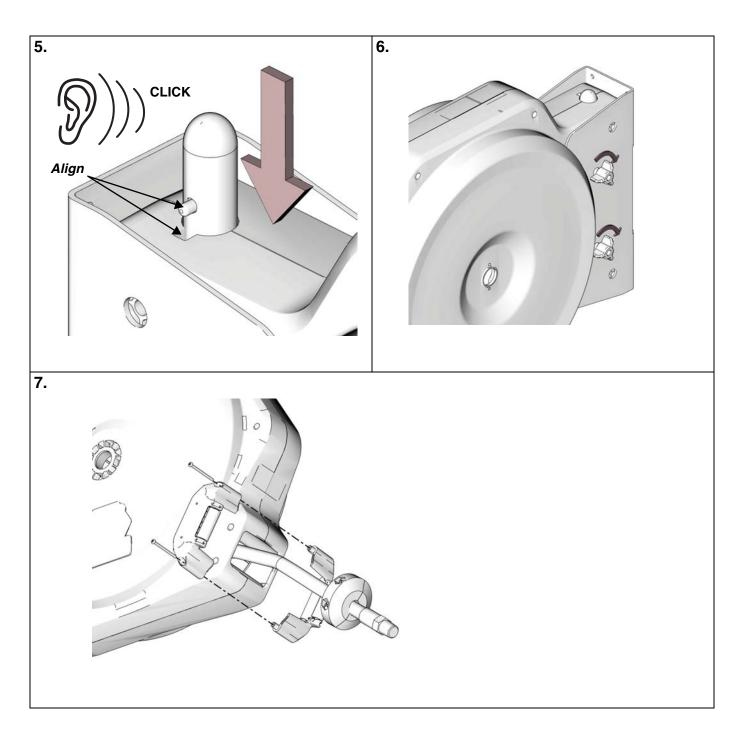



Disassembly




Pressure Relief Procedure

4 3A1220B

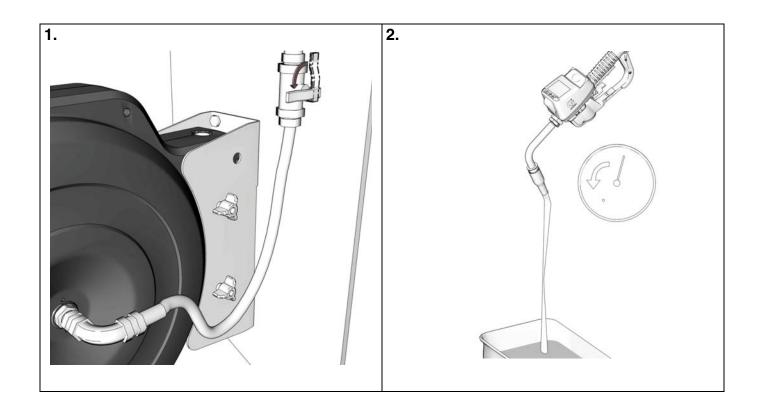

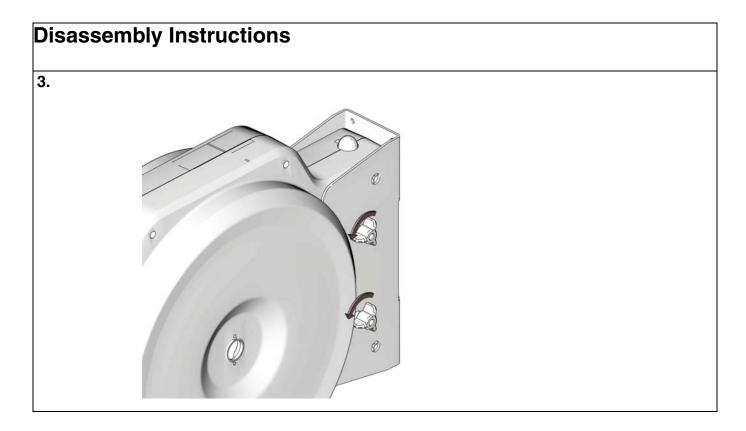

3A1220B 5

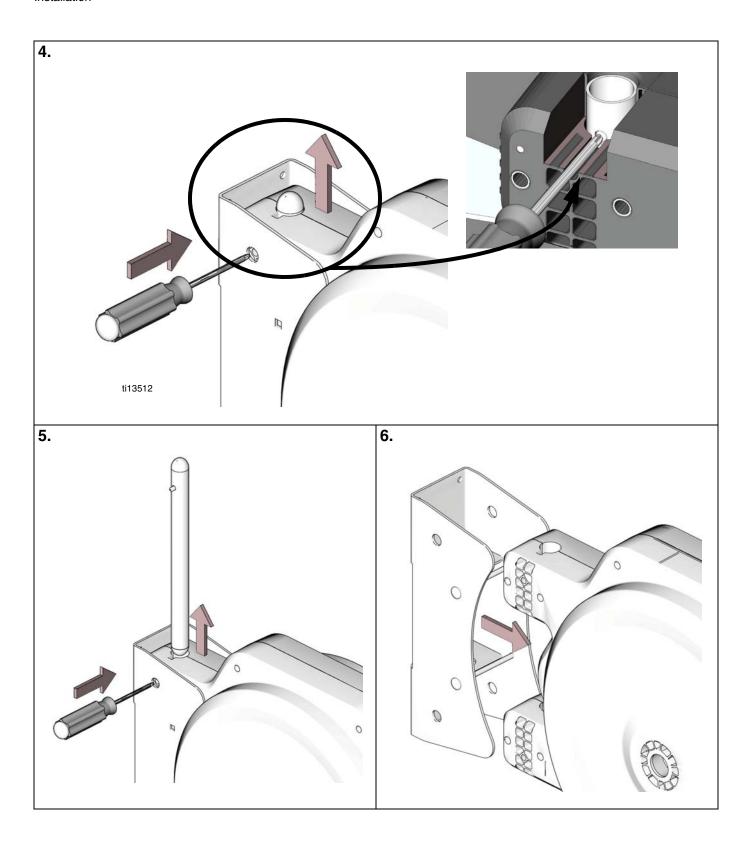


6 3A1220B

Technical Data

Hose Reel Weight

Model	Weight: kg (lb)
HEL13#	9.0 kg (19.8 lb)
HEL15#	9.5 kg (21 lb)
HEL23#	10.4 kg (23 lb)
HEL25#	11.0 kg (24.25 lb)
HEL33#	10.5 kg (23.1 lb)
HEM23#	11.4 kg (25.1 lb)
HEM33#	14.0 kg (30.8 lb)
HEH13#	13.2 kg (29.1 lb)
HEL34#	11.4 kg (25.1 lb)

Mounting Pattern and Dimensions

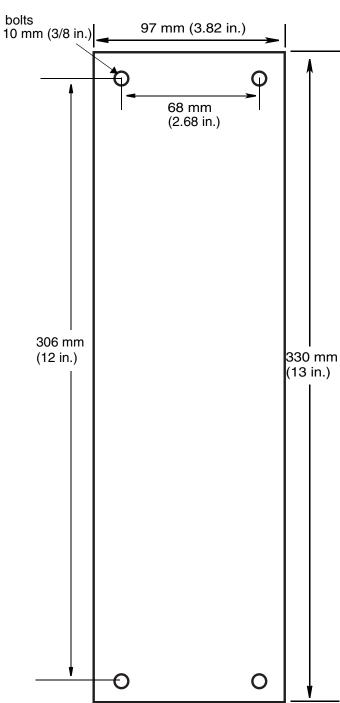

3A1220B 7

All written and visual data contained in this document reflects the latest product information available at the time of publication.

Graco reserves the right to make changes at any time without notice.

Original instructions. This manual contains English. 3A1220

Graco Headquarters: Minneapolis International Offices: Belgium, China, Japan, Korea

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441 Copyright 2010, Graco Inc. is registered to ISO 9001 www.graco.com 11/2010, revised 12/2010