


## Opis artykułu/ilustracje produktu

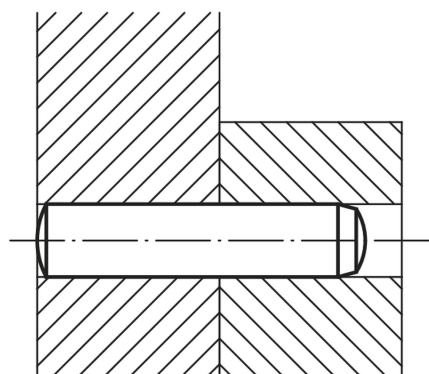

## Opis


## Materiał:

Stal narzędziowa 1.2067.

## Wersja:

hartowany. Twardość  $60 \pm 2$  HRC.

## Rysunki

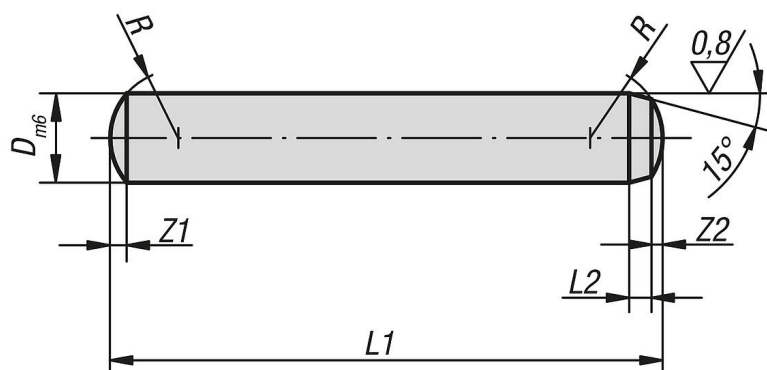

## Przegląd artykułów

| Nr Zamówienia | D   | L1 = długość                                          | L2  | R   | Z1   | Z2   |
|---------------|-----|-------------------------------------------------------|-----|-----|------|------|
| 03320-02X     | 2   | 6/8/10/12/14/16/18/20                                 | 0,6 | 2   | 0,3  | 0,18 |
| 03320-25X     | 2,5 | 6/8/10/12/14/16/18/20/22/24                           | 0,7 | 2,5 | 0,4  | 0,25 |
| 03320-03X     | 3   | 8/10/12/14/16/18/20/22/24/28/30/32                    | 0,8 | 3   | 0,45 | 0,3  |
| 03320-04X     | 4   | 8/10/12/14/16/18/20/22/24/28/30/32/36/40              | 1   | 4   | 0,6  | 0,4  |
| 03320-05X     | 5   | 10/12/14/16/18/20/22/24/28/30/32/36/40/45/50          | 1,2 | 5   | 0,75 | 0,5  |
| 03320-06X     | 6   | 10/12/14/16/18/20/22/24/28/30/32/36/40/45/50/55/60    | 1,5 | 6   | 0,9  | 0,6  |
| 03320-08X     | 8   | 12/14/16/18/20/22/24/28/30/32/36/40/45/50/55/60/70/80 | 1,8 | 8   | 1,2  | 0,8  |
| 03320-10X     | 10  | 16/18/20/24/28/30/32/36/40/45/50/55/60/70/80/90/100   | 2   | 10  | 1,5  | 1    |
| 03320-12X     | 12  | 18/20/24/28/30/32/36/40/45/50/55/60/70/80/90/100/120  | 2,5 | 12  | 1,8  | 1,3  |
| 03320-14X     | 14  | 24/28/32/36/40/45/50/55/60/70/80/90/100/120           | 2,5 | 16  | 2    | 1,3  |
| 03320-16X     | 16  | 24/28/32/36/40/45/50/55/60/70/80/90/100/110/120       | 3   | 16  | 2,5  | 1,7  |