

Opis artykułu/ilustracje produktu



Opis


Materiał:

Stal do ulepszania cieplnego.

Wersja:

Ulepszone cieplnie i oksydowane.

Rysunki

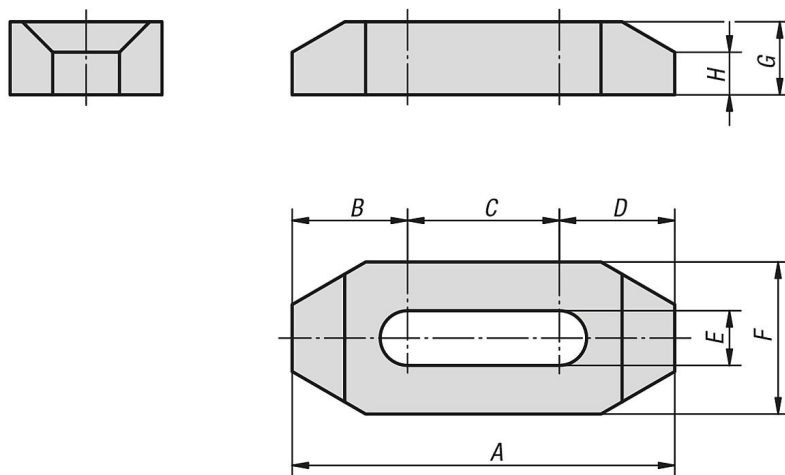

Przegląd artykułów

| Nr Zamówienia | A | B | C | D | E | F | G | H |
|---------------|-----|------|----|------|----|----|----|----|
| 04188-08063 | 63 | 19 | 25 | 19 | 9 | 25 | 12 | 7 |
| 04188-08080 | 80 | 24 | 32 | 24 | 9 | 25 | 12 | 7 |
| 04188-08100 | 100 | 30 | 40 | 30 | 9 | 25 | 16 | 10 |
| 04188-10063 | 63 | 19 | 25 | 19 | 11 | 25 | 12 | 7 |
| 04188-10080 | 80 | 24 | 32 | 24 | 11 | 25 | 16 | 10 |
| 04188-10100 | 100 | 30 | 40 | 30 | 11 | 25 | 16 | 10 |
| 04188-10125 | 125 | 40 | 45 | 40 | 11 | 32 | 19 | 13 |
| 04188-10160 | 160 | 55 | 50 | 55 | 11 | 32 | 19 | 13 |
| 04188-12063 | 63 | 19 | 25 | 19 | 13 | 32 | 16 | 10 |
| 04188-12080 | 80 | 24 | 32 | 24 | 13 | 32 | 16 | 10 |
| 04188-12100 | 100 | 30 | 40 | 30 | 13 | 32 | 19 | 13 |
| 04188-12125 | 125 | 40 | 45 | 40 | 13 | 32 | 19 | 13 |
| 04188-12160 | 160 | 55 | 50 | 55 | 13 | 32 | 25 | 15 |
| 04188-16080 | 80 | 27,5 | 25 | 27,5 | 17 | 32 | 16 | 10 |
| 04188-16100 | 100 | 34 | 32 | 34 | 17 | 38 | 19 | 13 |
| 04188-16125 | 125 | 42,5 | 40 | 42,5 | 17 | 38 | 19 | 13 |
| 04188-16160 | 160 | 55 | 50 | 55 | 17 | 38 | 25 | 15 |
| 04188-20100 | 100 | 34 | 32 | 34 | 21 | 38 | 19 | 13 |
| 04188-20125 | 125 | 42,5 | 40 | 42,5 | 21 | 38 | 25 | 15 |
| 04188-20160 | 160 | 55 | 50 | 55 | 21 | 38 | 25 | 15 |
| 04188-20200 | 200 | 68,5 | 63 | 68,5 | 21 | 50 | 25 | 15 |

