


MANUAL

T-Connector
Art. No. 0119558




INSTALLATION/CONNECTIONS

Electrical connection pin configuration, PNP type

Pin	Description	Value	Remarks
1*)	IN _{V+}	+24 VDC	Power input source from I/O block
2	Not in use		
3	IN _{GND}	GND	GND source from I/O block
4	S _{OUT}	+24 VDC	Output signal source to I/O block
5	Not in use		


*) Change to NPN type by switching pin 1 with 4.



Male


Installation example

I	T-connector
II	Cable M12 4-pin female, M12 4-pin male, PUR, L=2m
III	Vacuum switch VS4128
1, 2, 3	Electrical sequence order

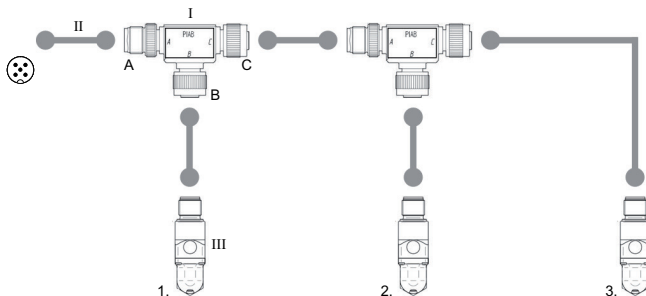

DIMENSIONS

T-CONNECTOR, ART. NO. 0119558

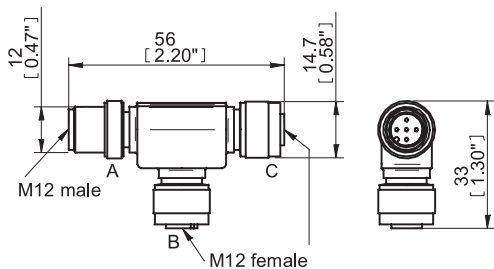


TECHNICAL DATA

Description	Unit	Value
Material		TPU, Zn
Temperature range	°C [°F]	-25-90 [-13-194]
Weight	g [oz]	25 [0.88]
Voltage, max.	V	60
Safety classification		IP65
Current, max.	A	4
Humidity	%RH	90

ACCESSORIES

Description	Art. No.
Cable M12 4-pin female, M12 4-pin male, PUR, L=2	0118322

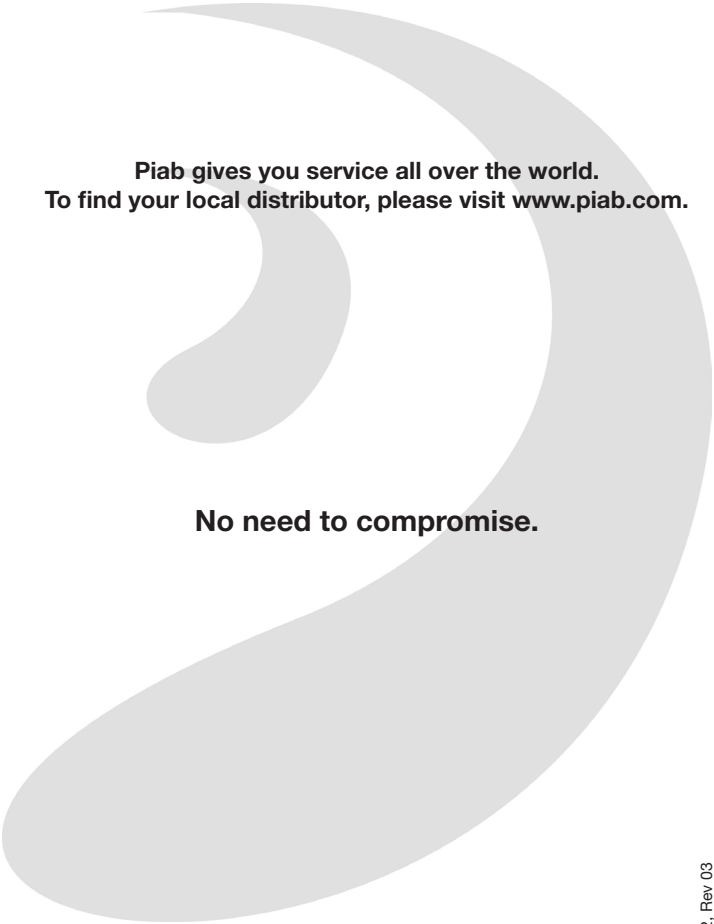

**Piab gives you service all over the world.
To find your local distributor, please visit www.piab.com.**

No need to compromise.

www.piab.com