


## piSAVE® Sense flow characteristics

Vacuum flow (NI/s)

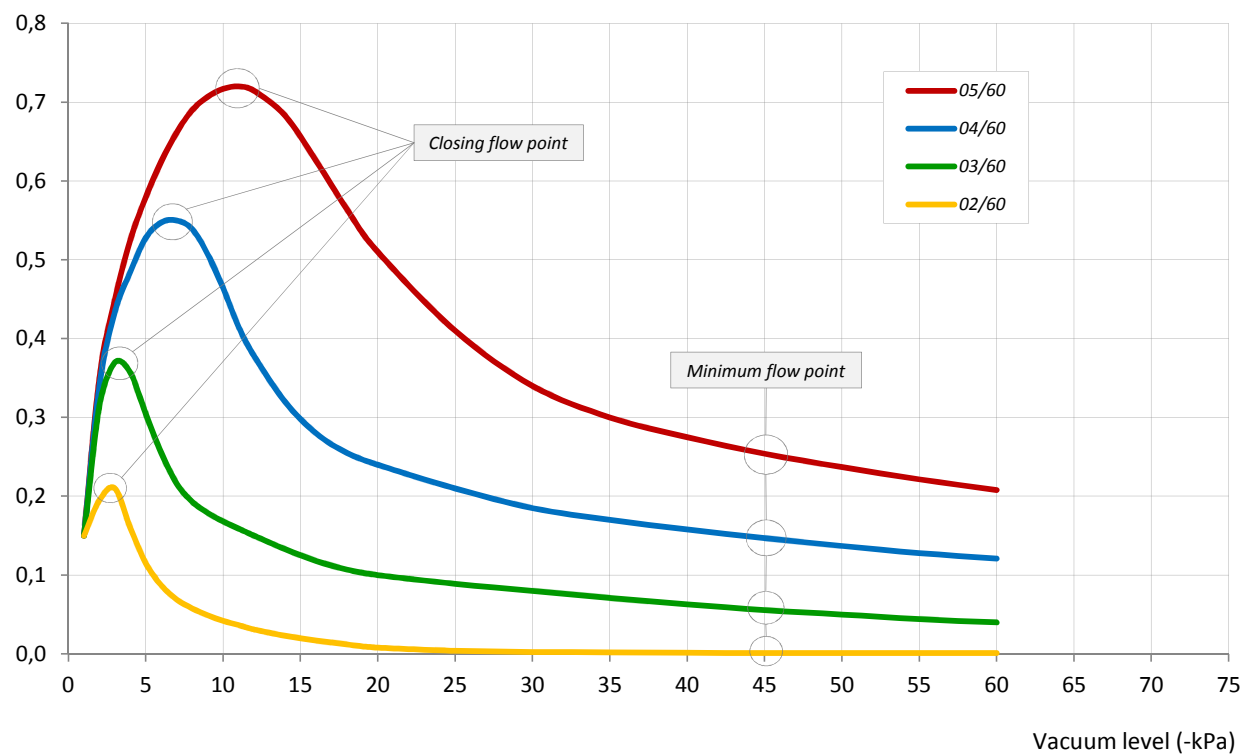

piSAVE® sense Multiple port fitting 02/60 (yellow) and 03/60 (green) are mainly suitable for sealed and smooth materials, such as metal and glass.

Description	Unit	Sense valve			
		02/60	03/60	04/60	05/60
Pump flow/cup to close valve	NI/s	0,21 (@ 3-kPa)	0,37 (@ 3-kPa)	0,55 (@ 7-kPa)	0,72 (@ 11-kPa)
Pump flow/cup minimum	NI/s	0,001 (@ 45-kPa)	0,06 (@ 45-kPa)	0,15 (@ 45-kPa)	0,25 (@ 45-kPa)