



Numer produktu: 0208909

Level compensator KSPH, G 1/8" female, stroke 50, non rotating

- Adjust differences in levels, for example on lifting devices with several suction cups.
- Less demand for exact positioning of vacuum handling device.
- Provides a certain degree of shock and vibration absorption.
- Allows for soft placement of cups on sensitive or thin objects.
- Non-rotational design, suitable for use with oval suction cups.
- Wide range of thread connections and stroke lengths.


Ogólne

Materiał	STEEL, BR, PM
Minimalna temperatura	0 - 80 °C
Waga	190 g
Objętość	4,82 cm ³

Parametry mechaniczne

Zakres pracy/Ugięcie	50 mm
Siła sprężystości	0,46 N/mm
Min. siła ugięcia	2,81 - 25,81 N

Rysunki wymiarowe

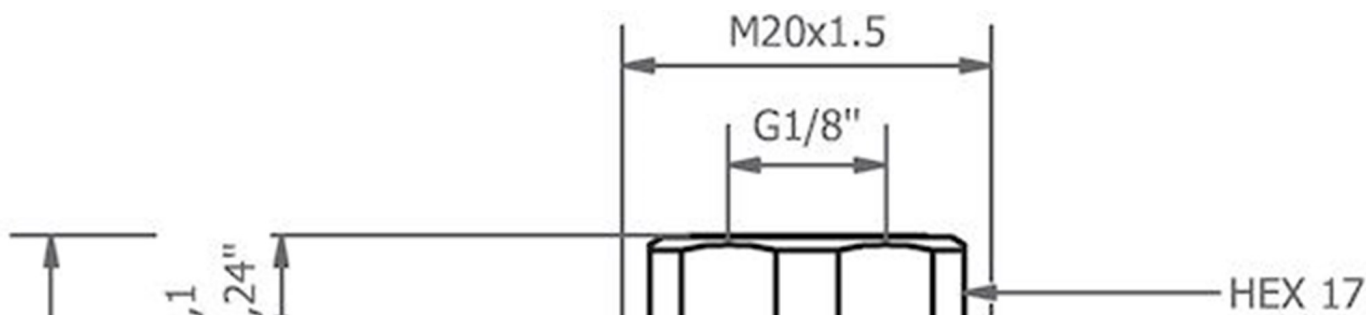


122
4,80"

64,9
2,56"

40
1,57"

6
0

1
,43"

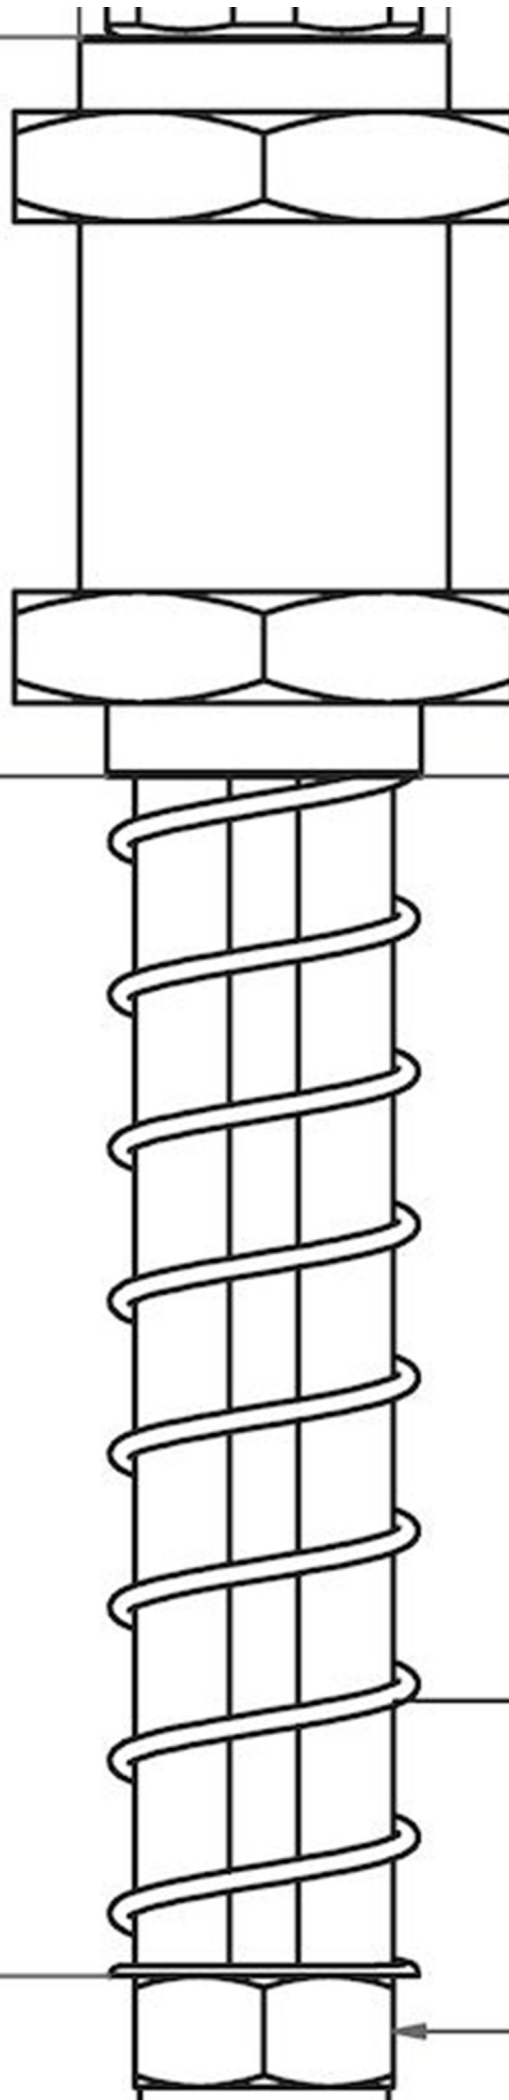

HEX 27

STROKE=50
1,97"

HEX 14

