



Numer produktu: 0208905

### Level compensator KSPH, G 1/8" male, stroke 75, non rotating

- Adjust differences in levels, for example on lifting devices with several suction cups.
- Less demand for exact positioning of vacuum handling device.
- Provides a certain degree of shock and vibration absorption.
- Allows for soft placement of cups on sensitive or thin objects.
- Non-rotational design, suitable for use with oval suction cups.
- Wide range of thread connections and stroke lengths.


#### Ogólne

Materiał	STEEL, BR, PM
Minimalna temperatura	0 - 80 °C
Waga	220 g
Objętość	5,64 cm <sup>3</sup>

#### Parametry mechaniczne

Zakres pracy/Ugięcie	75 mm
Siła sprężystości	0,26 N/mm
Min. siła ugięcia	4,71 - 24,21 N

#### Rysunki wymiarowe

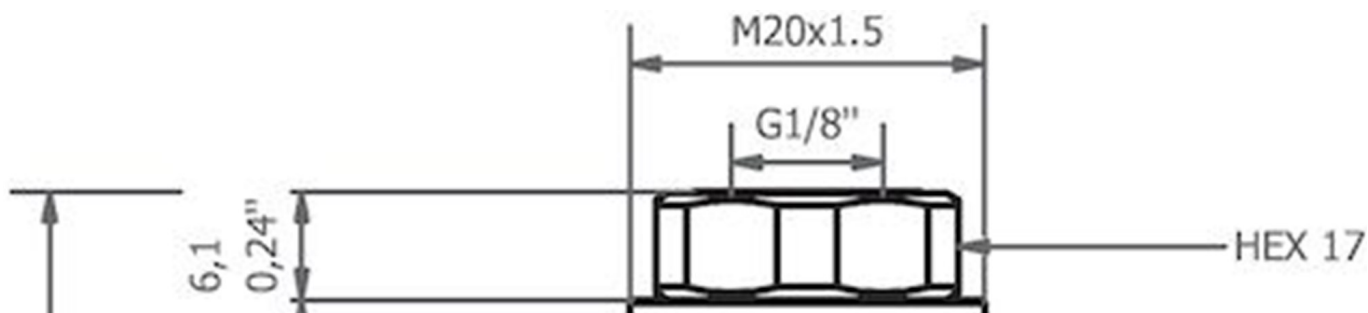

150,5  
5,93"

93,9  
3,70"

40  
1,57"

STROKE=75  
2,95"

HEX 27

HEX 27

