


# **ProBell™ Air Filters**

3A4799A

ΕN

Air Filters Kit (25C822) for ProBell Applicator Systems




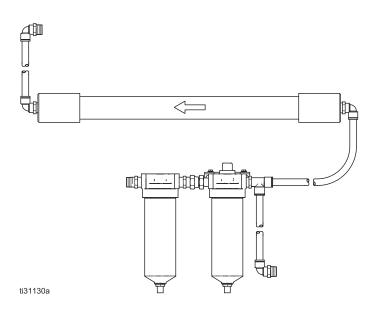


### **Installation Instructions**

- Using the two 1/4-20 x 2.75 inch screws (12) and hex lock nuts (13), fasten the coalescer filter base (10) to the wall or a cart. (If a wall mount is needed, the bracket may need to be removed during installation.)
- Using the two 2" loop clamps (3), the #10-24 x 2.5 inch screws (4), washers (5), and nuts (6) fasten the air dryer (1) to the wall, just above the filters, or to the cart.
- 3. Cut three pieces of hose (14) (see Kit Contents and Typical Installation) to length to reach from:
  - a. the air dryer outlet (A) to the speed control (B) (use one of the elbows from the kit, if needed)
  - b. the air dryer inlet (C) to the coalescer filter base tee (D)
  - the bottom of the coalescer tee fitting (E) to the air control (F) (use one of the elbows from the kit, if needed).
- 4. Attach the main air supply hose to the air filter inlet (G).


#### **Wall Mount**



#### **Cart Mount**

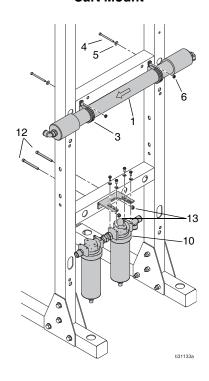


## **Kit Contents**

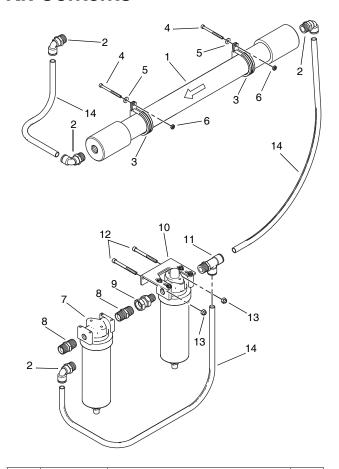

Ref	Part No	Description	Qty
1	118560	Air Dryer	1
2	15V204	Elbow Fitting	4
3	17M296	2" Loop Clamp	2
4	107183	Socket Head Cap Screw	2
5	112776	Plain Washer	2
6	113505	Hex Head Keps Nut	2
7	234402	Filter, 3 micron	1
8	158491	Nipple Fitting	2
9	190451	Union Adapter	1
10	234403	Filter, 0.01 Micron	1
11		Tee Fitting	1
12	107218	Socket Head Cap Screw	2
13	102040	Hex Lock Nut	2
14		Nylon Tube, 1/2 OD x 3/8" ID	10 ft
17	158581	Hex Coupling, 1/2 x 1/2 NPT (not shown)	2

## **Typical Installation**

The typical installation drawing below identifies hose connections for the filter kit.



Α	Air Dryer Outlet
В	Speed Control
С	Air Dryer Inlet
D	Tee Fitting, Side
E	Tee Fitting, Bottom
F	Air Control
G	Air Filter Inlet

*3A4799A 3* 

## **Graco Information**

For the latest information about Graco products, visit www.graco.com.

For patent information, see www.graco.com/patents.

TO PLACE AN ORDER, contact your Graco distributor or call to identify the nearest distributor.

Phone: 612-623-6921 or Toll Free: 1-800-328-0211 Fax: 612-378-3505

All written and visual data contained in this document reflects the latest product information available at the time of publication.

Graco reserves the right to make changes at any time without notice.

Original instructions. This manual contains English. MM 3A3642

Graco Headquarters: Minneapolis International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA Copyright 2015, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.